

1 2 3 4 5 6 7 8

H

H

Q

Q

A








A

U

U

C

C

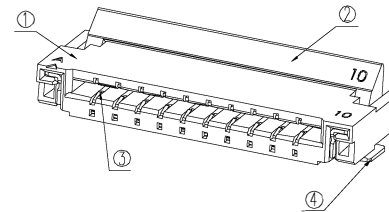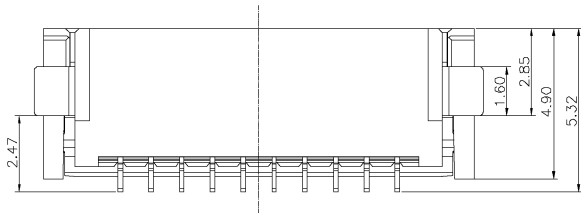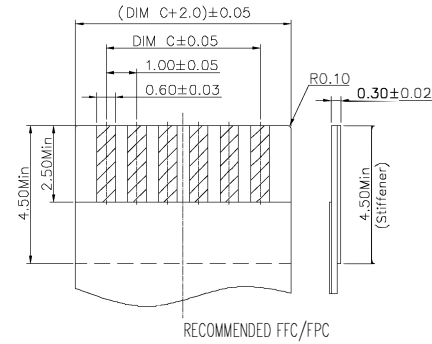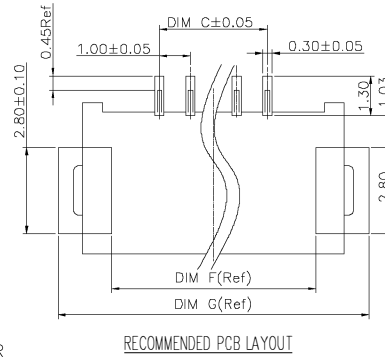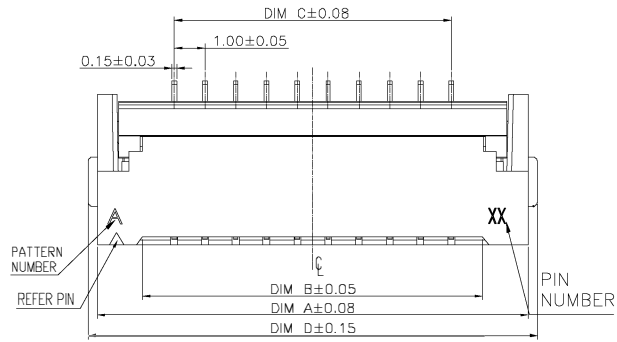

Pin No.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G
4	8.00	5.05	3.00	8.60	6.60	6.40	9.60
5	9.00	6.05	4.00	9.60	7.60	7.40	10.60
6	10.00	7.05	5.00	10.60	8.60	8.40	11.60
7	11.00	8.05	6.00	11.60	9.60	9.40	12.60
8	12.00	9.05	7.00	12.60	10.60	10.40	13.60
9	13.00	10.05	8.00	13.60	11.60	11.40	14.60
10	14.00	11.05	9.00	14.60	12.60	12.40	15.60
11	15.00	12.05	10.00	15.60	13.60	13.40	16.60
12	16.00	13.05	11.00	16.60	14.60	14.40	17.60
13	17.00	14.05	12.00	17.60	15.60	15.40	18.60
14	18.00	15.05	13.00	18.60	16.60	16.40	19.60
15	19.00	16.05	14.00	19.60	17.60	17.40	20.60
16	20.00	17.05	15.00	20.60	18.60	18.40	21.60
17	21.00	18.05	16.00	21.60	19.60	19.40	22.60
18	22.00	19.05	17.00	22.60	20.60	20.40	23.60
19	23.00	20.05	18.00	23.60	21.60	21.40	24.60
20	24.00	21.05	19.00	24.60	22.60	22.40	25.60
21	25.00	22.05	20.00	25.60	23.60	23.40	26.60
22	26.00	23.05	21.00	26.60	24.60	24.40	27.60
23	27.00	24.05	22.00	27.60	25.60	25.40	28.60
24	28.00	25.05	23.00	28.60	26.60	26.40	29.60
25	29.00	26.05	24.00	29.60	27.60	27.40	30.60
26	30.00	27.05	25.00	30.60	28.60	28.40	31.60
27	31.00	28.05	26.00	31.60	29.60	29.40	32.60
28	32.00	29.05	27.00	32.60	30.60	30.40	33.60
29	33.00	30.05	28.00	33.60	31.60	31.40	34.60
30	34.00	31.05	29.00	34.60	32.60	32.40	35.60
36	40.00	37.05	35.00	40.60	38.60	38.40	41.60
40	44.00	41.05	39.00	44.60	42.60	42.40	45.60

3. PERFORMANCE:

- 3.1: CURRENT RATING: 0.5A/PIN.
- 3.2: VOLTAGE RATING: 50V (AC/DC).
- 3.3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max,
- 3.4: INSULATION RESISTANCE: 500MOHM Min.
- 3.5: DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1MINUTE;
- 3.6: DURABILITY: 20 TIMES Min.
- 3.7: OPERATING TEMPERATURE: $-40^{\circ}C$ $+85^{\circ}C$
OPERATING HUMIDITY RANGE: 20% TO 85%

ALL LINK CONN. TECHNOLOGY CORP.

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$ UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : DAVID	DATE : 2016-5-14	PART NAME: 1.0PH 2.0H 前插後壓FPC	
	CHECKED BY: SANDY	DATE : 2016-5-14	PART NO.	TFFD-10FPCXX-200
	APPROVED BY: FRANK	DATE : 2016-5-14	MOLD NO.	
			DRAW NO:	
			SHEET NO.	10F1