
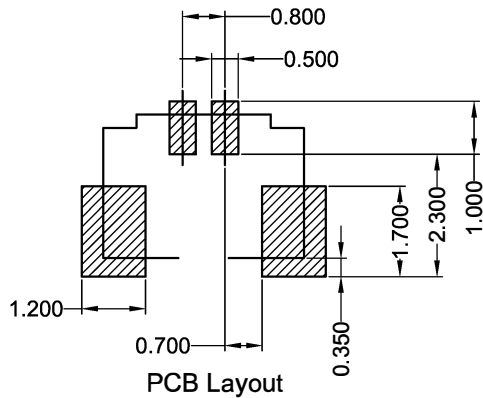
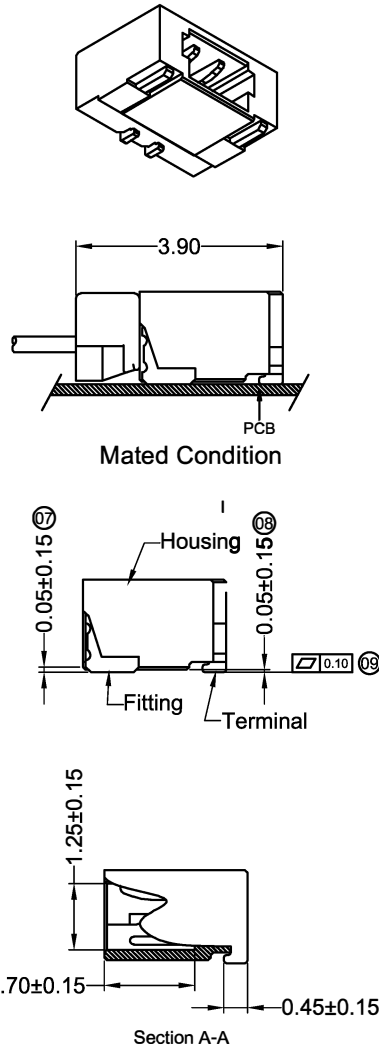


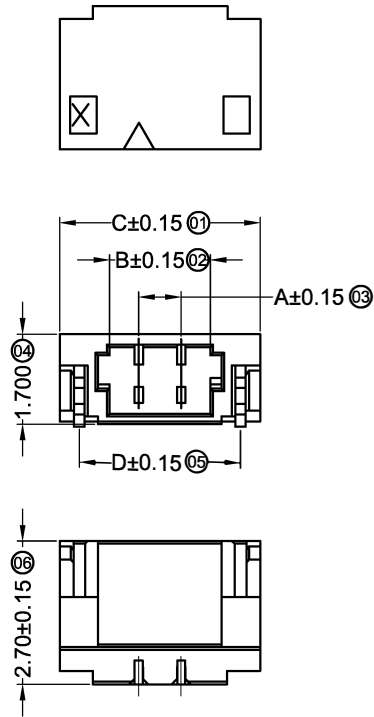

■ Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

Ordering Code:

TS080WR-S - $\frac{X}{2}$ $\frac{X}{3}$ $\frac{X}{4}$ $\frac{X}{5}$ -00

- ① Series No.
② No. of Circuits: 02 to 20
③ Plating:

T= 100u" Min. Tin Plated
over 50u" Nickel

G= Gold flash plated over
0.76um(30u") Nickel

- ④ A= Reel packing
C= Tube packing

- ⑤ Process Options:
-HF=For Lead Free IR Processes
and Halogen-Free

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	0.80	1.90	3.78	3.04	12	8.80	9.90	11.78	11.04
03	1.60	2.70	4.58	3.84	13	9.60	10.70	12.58	11.84
04	2.40	3.50	5.38	4.64	14	10.40	11.50	13.38	12.64
05	3.20	4.30	6.18	5.44	15	11.20	12.30	14.18	13.44
06	4.00	5.10	6.98	6.24	16	12.00	13.10	14.98	14.24
07	4.80	5.90	7.78	7.04	17	12.80	13.90	15.78	15.04
08	5.60	6.70	8.58	7.84	18	13.60	14.70	16.58	15.84
09	6.40	7.50	9.38	8.64	19	14.40	15.50	17.38	16.64
10	7.20	8.30	10.18	9.44	20	15.20	16.30	18.18	17.44
11	8.00	9.10	10.98	10.24					

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.	
X±	X*± j*		
X± 0.30	.X*±		
.XX± 0.20	.XX*±		
XXX± 0.10	.XXX*±		
CUSTOMER DRAWING		PART NO. TS080WR-S-XXXX-00	DWG NO. 20140425
APPROVED Kevin	CHECKED: sam	DRAWN: Allen	UNIT mm
		SCALE: 1:1	SHEET: 1 / 1
		PROJ.	REV. B