

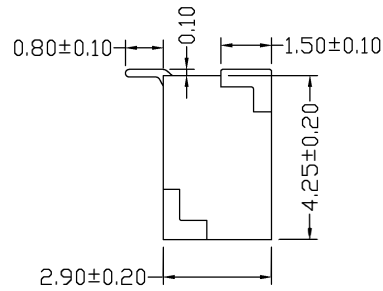


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER


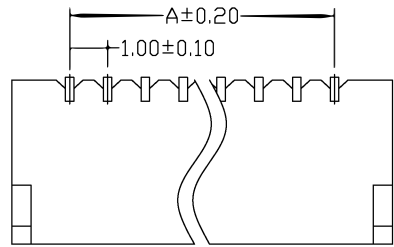


■ Specifications(规格) :

- Voltage rating(额定电压) : 50V AC / DC
- Current rating(额定电流) : 1A AC / DC
- Withstanding voltage(耐压值) : 500V AC/minute
- Temperature range(工作温度) : -25°C~+85°C
- Insulation resistance(绝缘电阻) : ≥100MΩ
- Contact resistance(接触电阻) : ≤20mΩ
- After environmental testing(环境测试后) : ≤30mΩ

Ordering Code:


TS105WV- S - X X X X -00
 ① ② ③ ④ ⑤

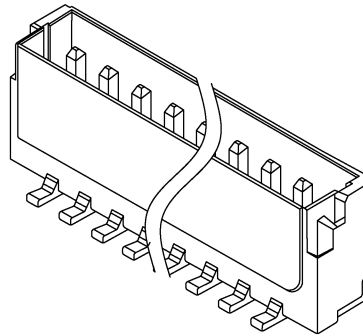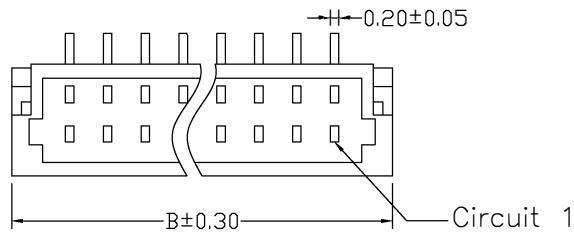

- ① Series No.
- ② Contacts: 02 to 24
- ③ Plating:
T= 100u" Min. Tin Plated
over 50u" Nickel
- ④ A= Reel packing
C= Tube packing

⑤ Process Options:

HF=For Lead Free IR Processes and Halogen-Free

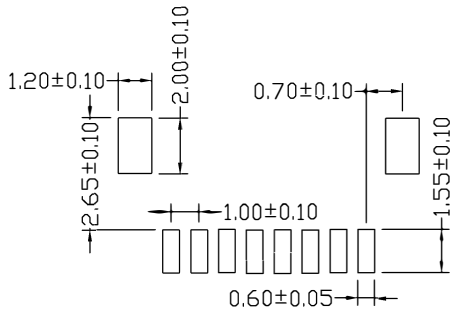

Recommad PCB Layout

Poles	Dimensions (mm)	
	A	B
2	1.00	4.00
3	2.00	5.00
4	3.00	6.00
5	4.00	7.00
6	5.00	8.00
7	6.00	9.00
8	7.00	10.00
9	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00
24	23.00	26.00

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.	
X±	X°± 1°		
.X± 0.30	.X°±		
.XX± 0.20	.XX°±		
.XXX± 0.10	.XXX°±		
CUSTOMER DRAWING		PART NO. TS105WV-S-XXXX-00	DWG NO. 20121219
APPROVED Paul	CHECKED: sam	DRAWN: Allen	UNIT mm
		SCALE: 1:1	SHEET: 1 / 1
		PROJ.	REV. A