
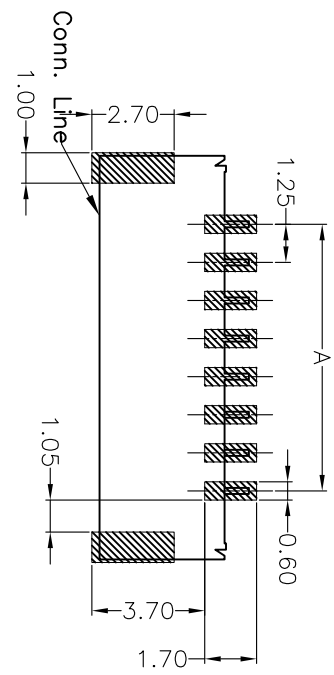
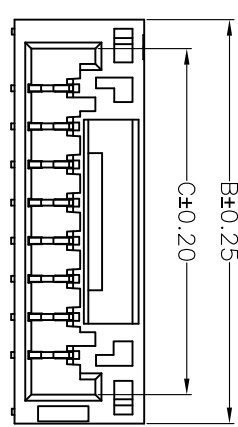
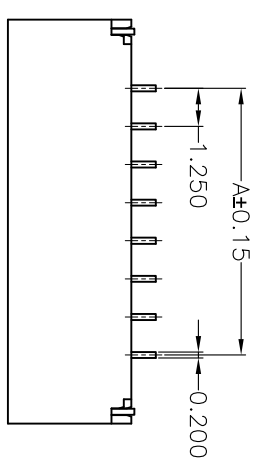


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin-plated
Solder Tabs: PhosphorBronze/Tin-plated
Material:NT16T,UL94V-0
Color: Natural(Beige)



Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	5.75	3.85	09	10.00	14.50	12.60
03	2.50	7.00	5.10	10	11.25	15.75	13.85
04	3.75	8.25	6.35	11	12.50	17.00	15.10
05	5.00	9.50	7.60	12	13.75	18.25	16.35
06	6.25	10.75	8.85	13	15.00	19.50	17.60
07	7.50	12.00	10.10	14	16.25	20.75	18.85
08	8.75	13.25	11.35	15	17.50	22.00	20.10

- Ordering Code:**
TS126WR-S-XX X X X-00
① Series No.
② No. of Circuits
③ Plating option:
T = 3.05um (120u") Matte Tin
over 0.76um(30u") Nickel
G = Gold Flash plated over
1.27um(50u") Nickel
- ④ OPTION: C= Tube Packing
A= Tape & Reel Packing
⑤ -HF=For Lead Free Wave flow Process
and Halogen-Free

GENERAL TOLERANCE		X± 1°	
X± 0.30		X±	
.XX± 0.20		XX±	
.XXX± 0.10		XXX±	
CUSTOMER DRAWING			
APPROVED	CHECKED:	DRAWN:	SCALE:
Kevin	Paul	Frank	1:1
PART NO. TS126WR-S-XXXX-XX		DWG NO. 20130814	
FRONTIER TECHNOLOGY CO.,LTD.		SHEET 1 / 1	
TITLE: 1.25mm Crimp Style Connector		A	

鉅創科技有限公司
FRONTIER TECHNOLOGY CO.,LTD.

20130814

SCALE: 1:1
SHEET 1 / 1
A