
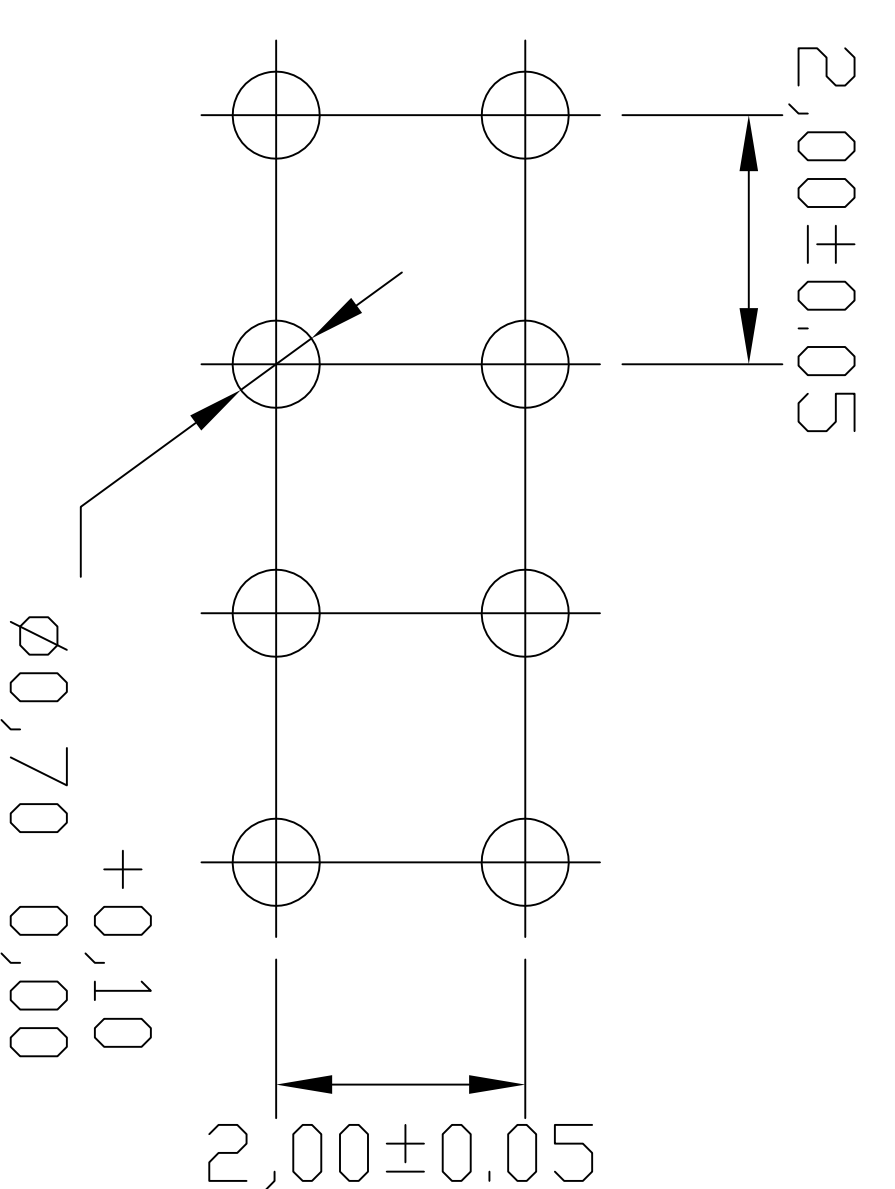
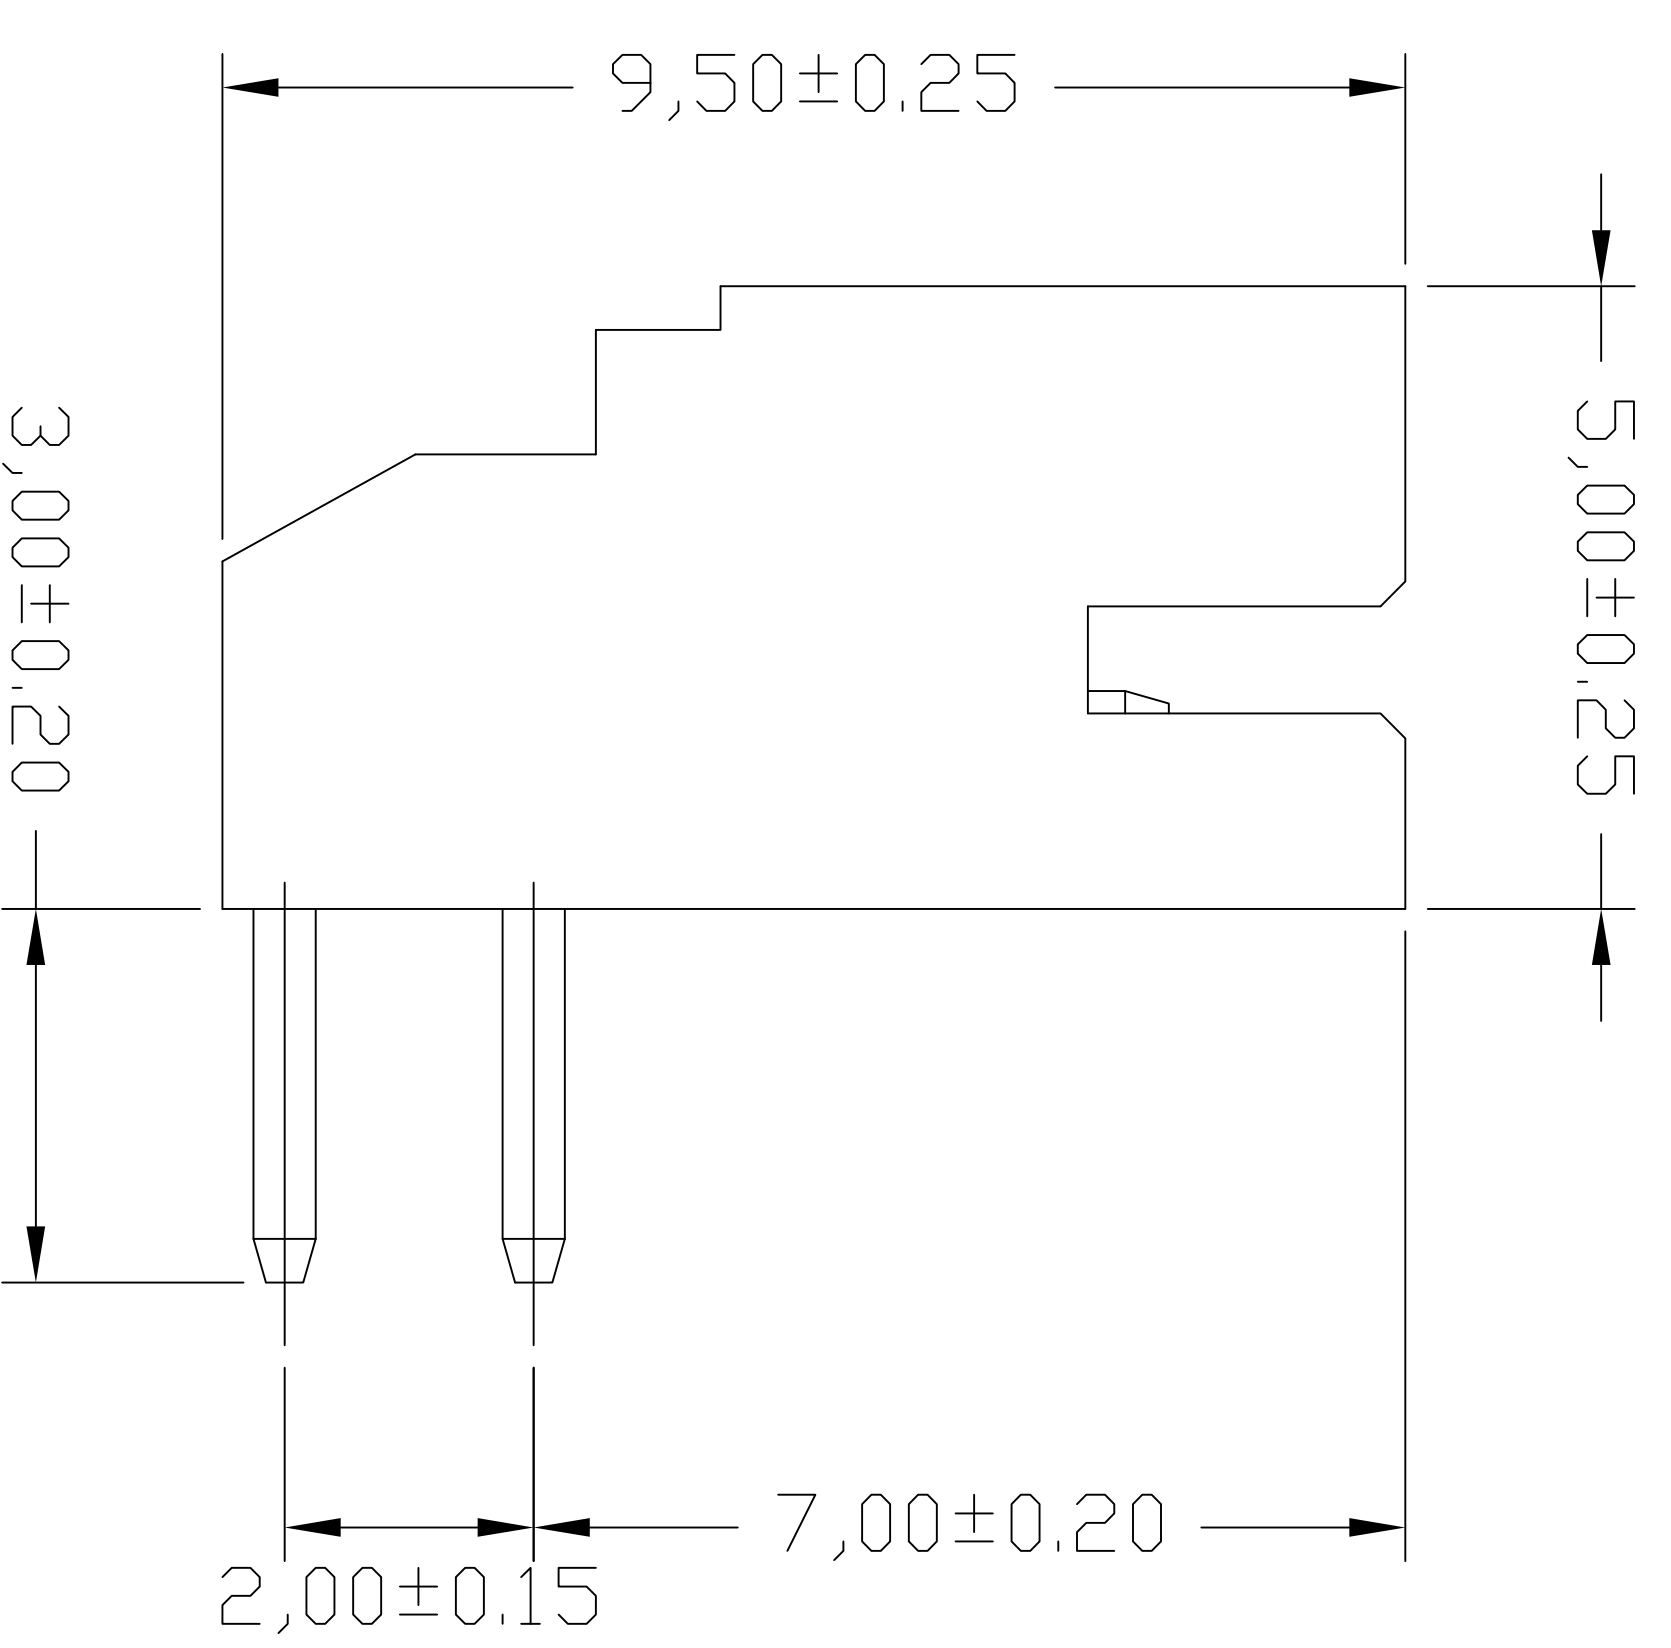
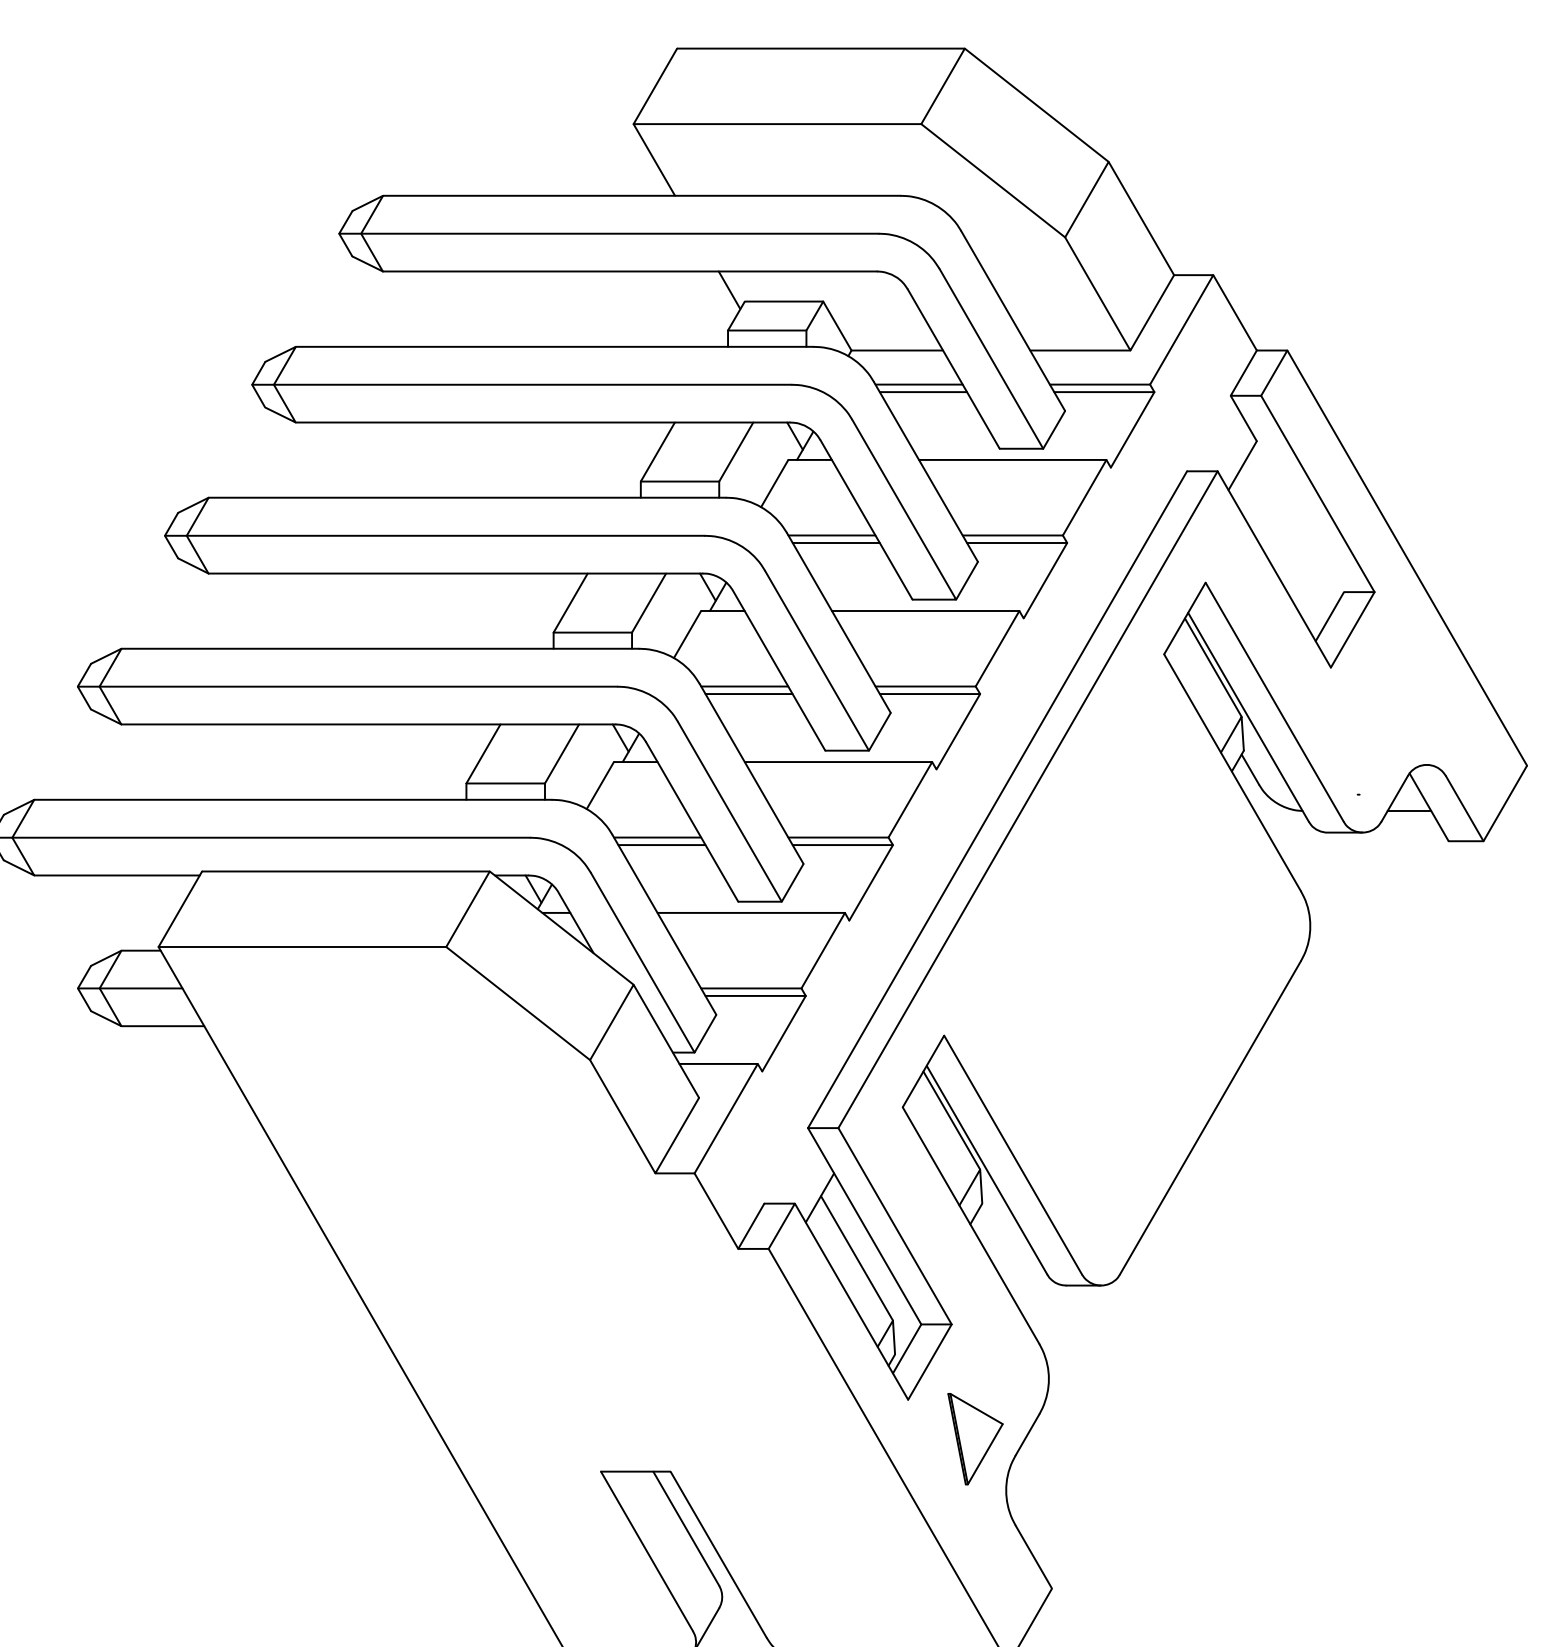
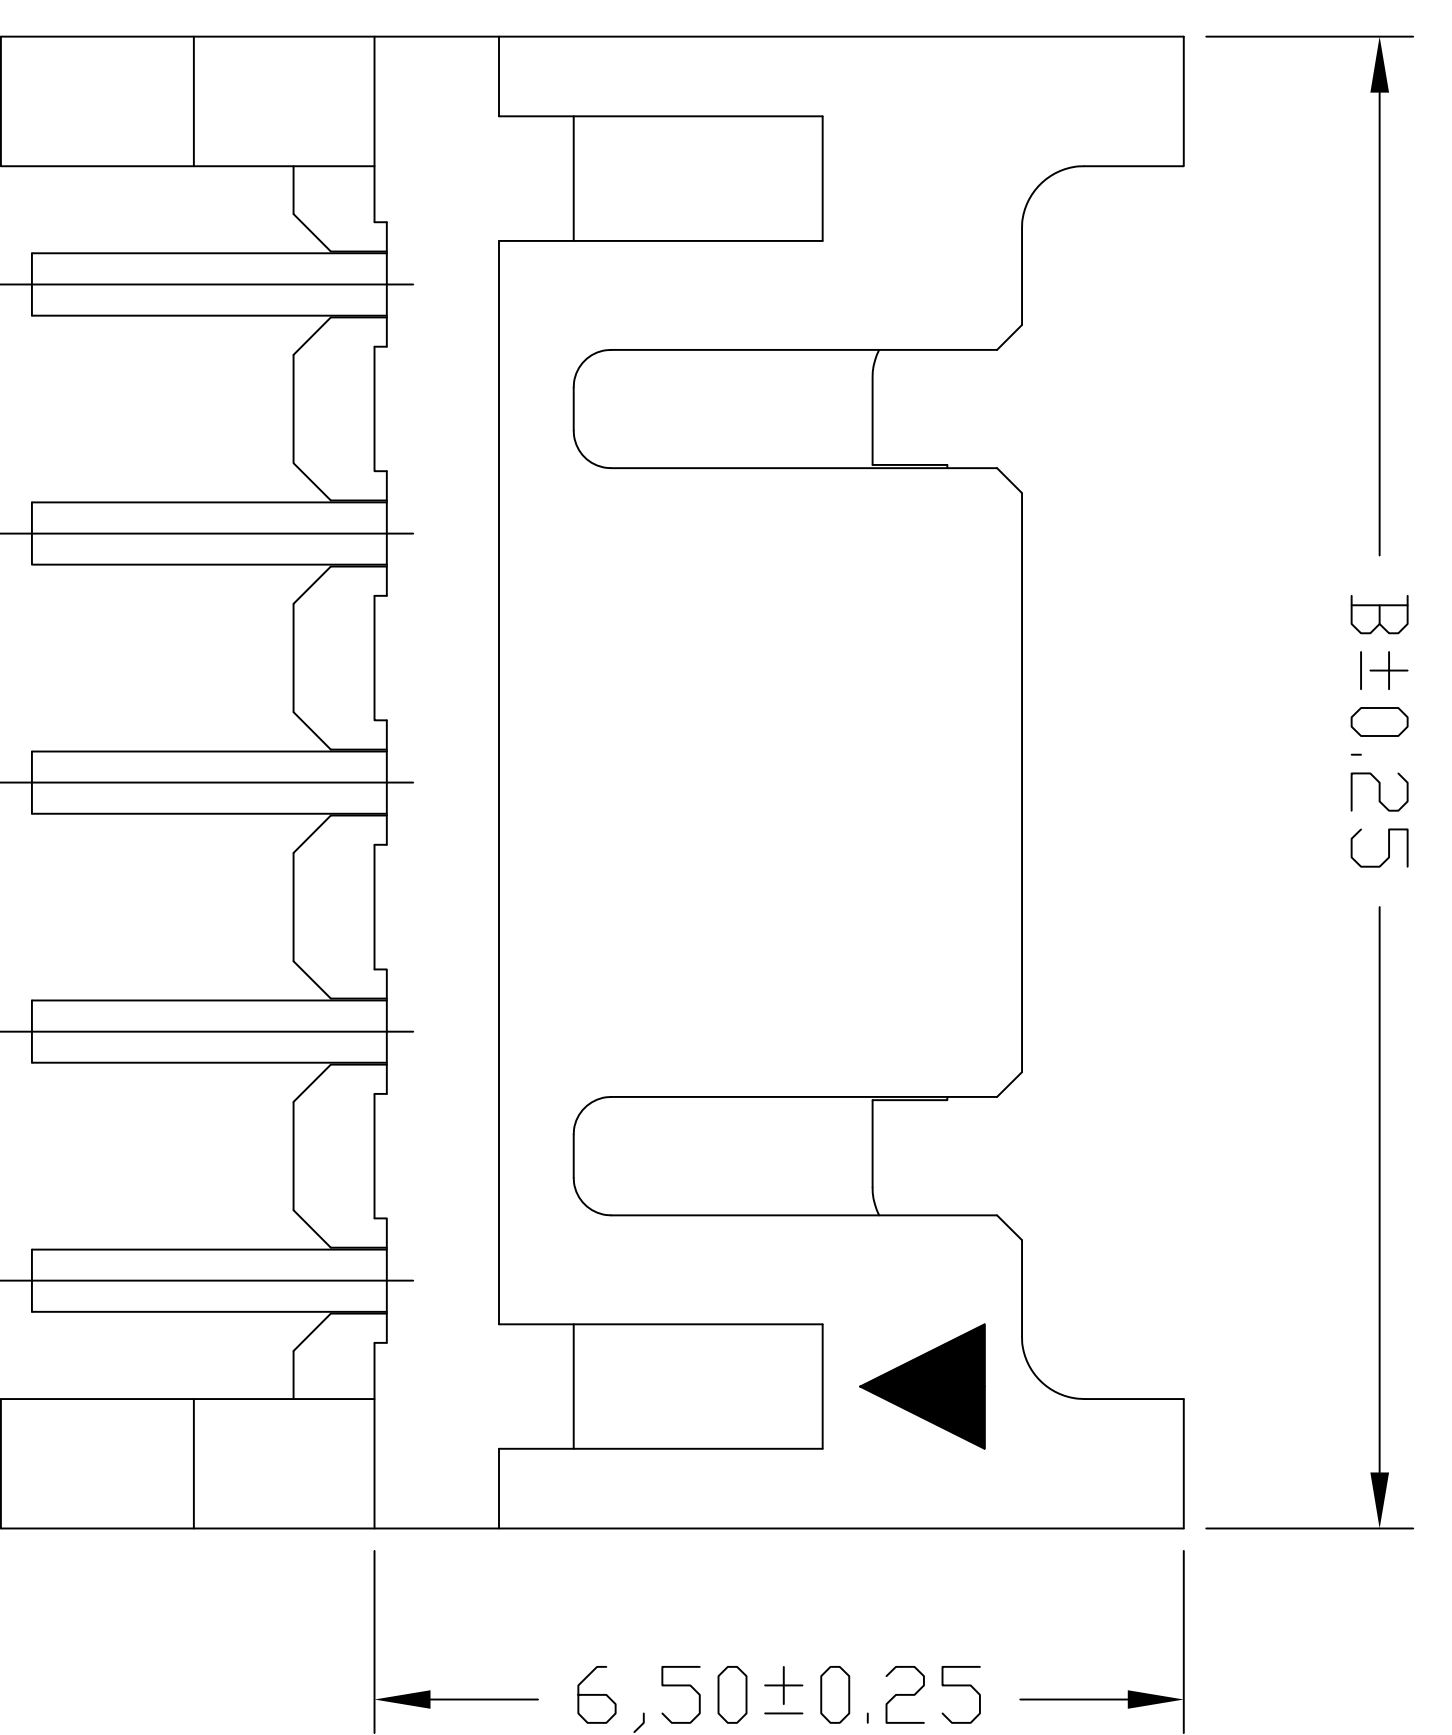


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Pantone Color: 7528C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
TS204WR-0410	2.00	6.00
TS204WR-0610	4.00	8.00
TS204WR-0810	6.00	10.00
TS204WR-1010	8.00	12.00
TS204WR-1210	10.00	14.00
TS204WR-1410	12.00	16.00
TS204WR-1610	14.00	18.00
TS204WR-1810	16.00	20.00
TS204WR-2010	18.00	22.00
TS204WR-2210	20.00	24.00
TS204WR-2410	22.00	26.00
TS204WR-2610	24.00	28.00
TS204WR-2810	26.00	30.00
TS204WR-3010	28.00	32.00
TS204WR-3210	30.00	34.00
TS204WR-3410	32.00	36.00
TS204WR-3610	34.00	38.00
TS204WR-3810	36.00	40.00
TS204WR-4010	38.00	42.00

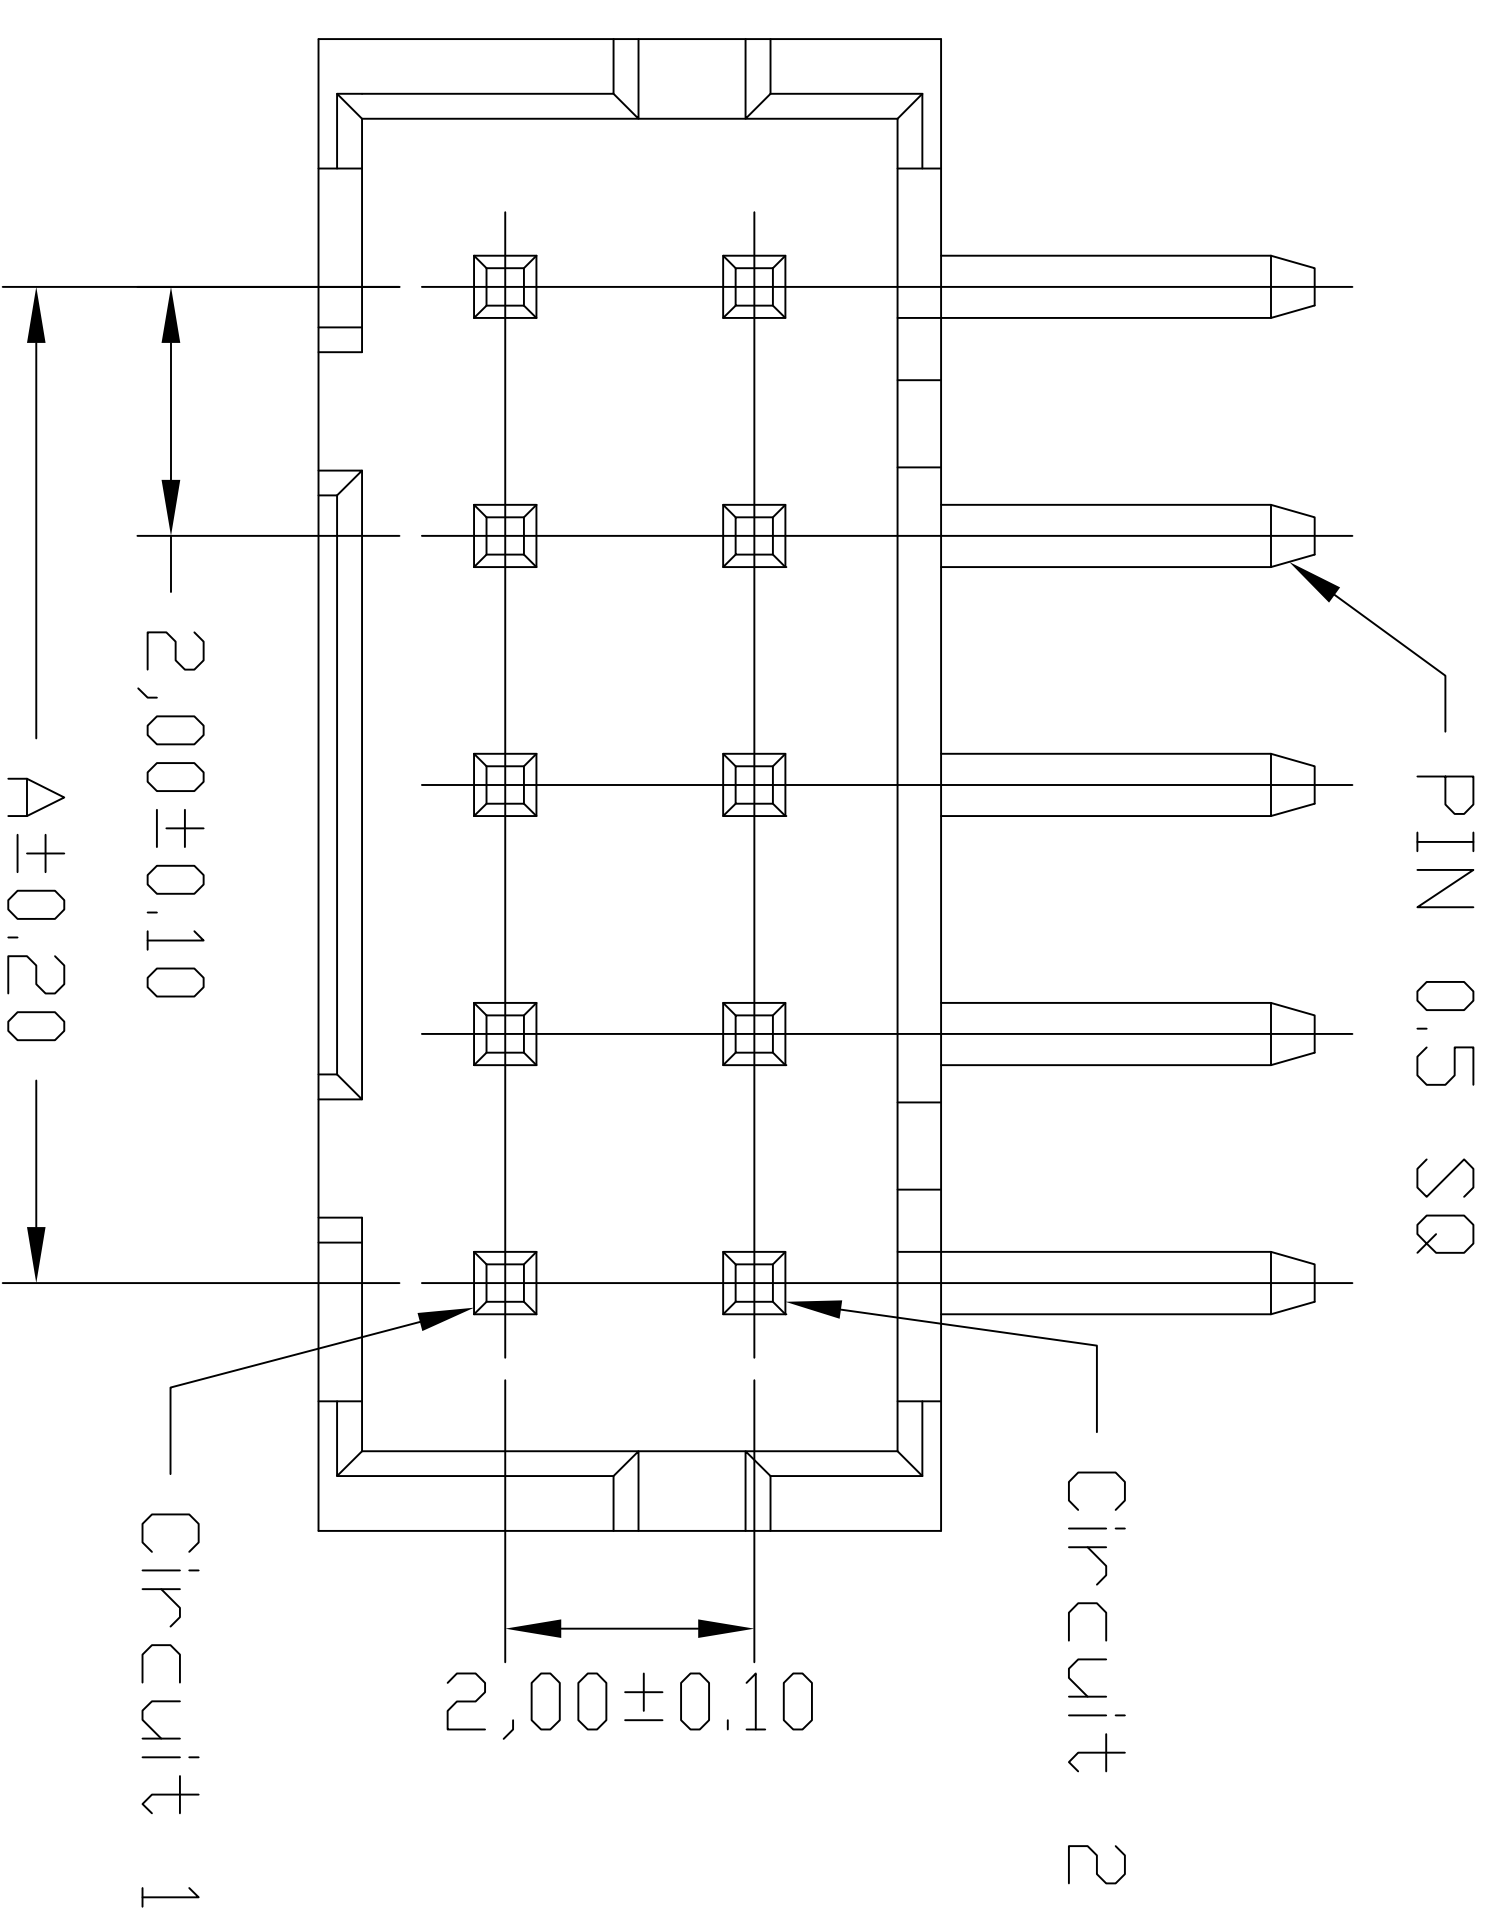

P.C.B LAYOUT

GENERAL TOLERANCE	
X±	X.± 1°
X± 0.30	X.±
.XX± 0.20	.XX±
.XXX± 0.10	.XXX±

CUSTOMER DRAWING

PART NO.
TS204WR-XX10

DWG NO.

20120318

銳創科技有限公司
 TRONTEK TECHNOLOGY CO., LTD.

TITLE:
2.00mm WIRE TO BOARD RIGHT ANGLE

APPROVED
Paul

CHECKED:
Paul

DRAWN:
sunny

UNIT
mm

SCALE: 1:1

SHEET: 1 / 1
 PROJ. REG. A