

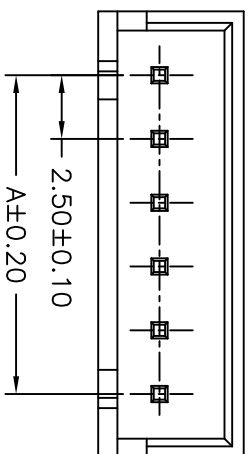


REV.	ECH. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)



B±0.25

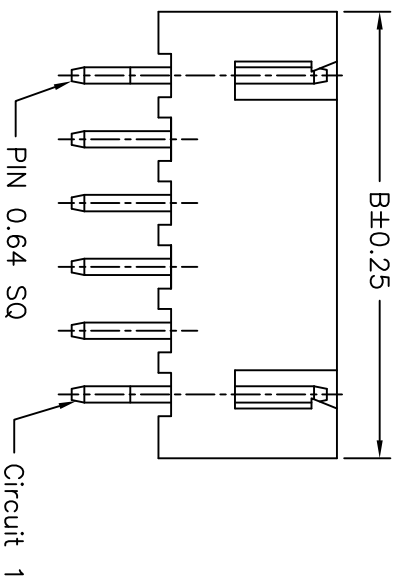

P.C.B. LAYOUT

Ordering Code:

TS251WV- X X X X
 ① ② ③ ④

- ① Series No.
- ② No. of Circuits




③ Plating option:

- 1 = 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel Type 1
- 2 = 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel Type 2
- 3 = 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel Type 3
- ④ Type: V = Straight

Packing: Bag

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
TS251WV-02XV	2.50	7.50
TS251WV-03XV	5.00	10.00
TS251WV-04XV	7.50	12.50
TS251WV-05XV	10.00	15.00
TS251WV-06XV	12.50	17.50
TS251WV-07XV	15.00	20.00
TS251WV-08XV	17.50	22.50
TS251WV-09XV	20.00	25.00
TS251WV-10XV	22.50	27.50
TS251WV-11XV	25.00	30.00
TS251WV-12XV	27.50	32.50
TS251WV-13XV	30.00	35.00
TS251WV-14XV	32.50	37.50
TS251WV-15XV	35.00	40.00
TS251WV-16XV	37.50	42.50
TS251WV-17XV	40.00	45.00
TS251WV-18XV	42.50	47.50
TS251WV-19XV	45.00	50.00
TS251WV-20XV	47.50	52.50

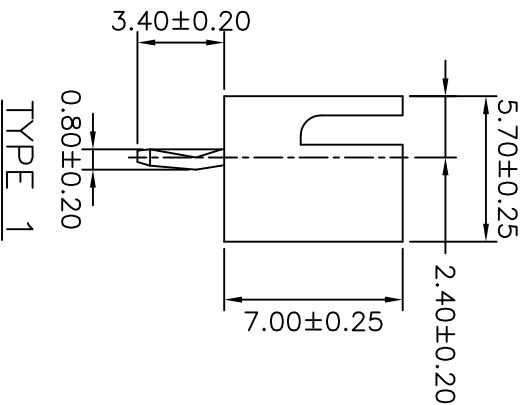

鉅創科技有限公司

FRONTIER TECHNOLOGY CO., LTD.

GENERAL TOLERANCE	
X±	X±1°
X± 0.30	X±
.XX± 0.20	.XX±
.XXX± 0.10	.XXX±

CUSTOMER DRAWING

PART NO. TS251WV-XXXV

WAFER 2.50mm(0.89") STRAIGHT

SCALE: 1:1 SHEET: 1 / 1

APPROVED Tony

CHECKED: Tony

DRAWN: sunny

mm

SCALE: 1:1 SHEET: 1 / 1

1 2 3 4 5 6 7 8 9 10 11 12

A B C D E F G H I J