
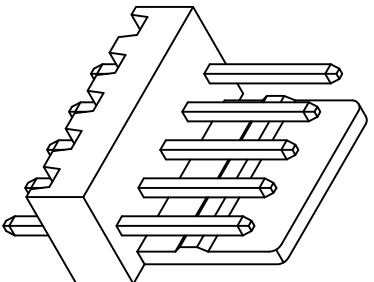
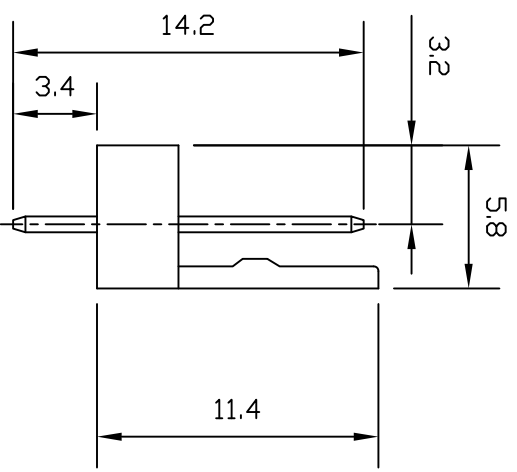

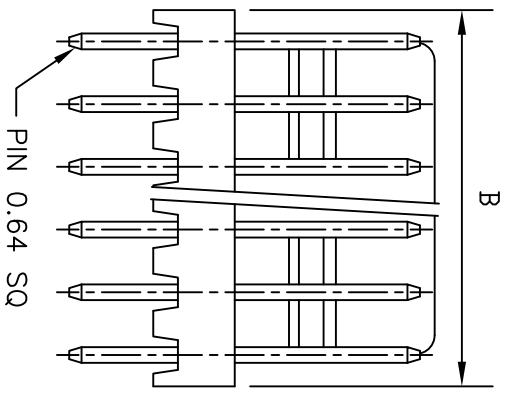


| REV. | ECN NO. | LOCATIONS | DESCRIPTION | DATE | CHANGER |
|------|---------|-----------|-------------|------|---------|
| | | | | | |

Material :

- * Insulation:
Nylon 66 , UL 94V-2
Color Nature(Translucent)
- * Contact : Brass / Tin Plated

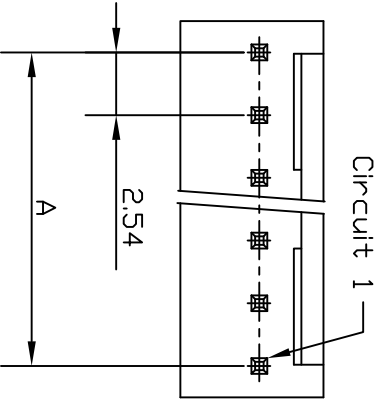

Ordering Code:

TS242WV - X X X X X
① ② ③ ④

- ① Series No.
- ② NO. OF CIRCUITS: 02 TO 20
- ③ PLATING OPTION: T= Tin plated
- ④ Packing: B= Bag packing

Ordering Information & Dimensions

| PART NO. | Dimensions | |
|--------------|------------|-------|
| | A | B |
| TS242WV-02TB | 2.54 | 5.08 |
| TS242WV-03TB | 5.08 | 7.62 |
| TS242WV-04TB | 7.62 | 10.16 |
| TS242WV-05TB | 10.16 | 12.70 |
| TS242WV-06TB | 12.70 | 15.24 |
| TS242WV-07TB | 15.24 | 17.78 |
| TS242WV-08TB | 17.78 | 20.32 |
| TS242WV-09TB | 20.32 | 22.86 |
| TS242WV-10TB | 22.86 | 25.40 |
| TS242WV-11TB | 25.40 | 27.94 |
| TS242WV-12TB | 27.94 | 30.48 |
| TS242WV-13TB | 30.48 | 33.02 |
| TS242WV-14TB | 33.02 | 35.56 |
| TS242WV-15TB | 35.56 | 38.10 |
| TS242WV-16TB | 38.10 | 40.64 |
| TS242WV-17TB | 40.64 | 43.18 |
| TS242WV-18TB | 43.18 | 45.72 |
| TS242WV-19TB | 45.72 | 48.26 |
| TS242WV-20TB | 48.26 | 50.80 |

| GENERAL TOLERANCE | |
|-------------------|-------------------|
| X± | X [±] 1° |
| X± 0.25 | X [±] |
| .XX± 0.15 | .XX [±] |
| XXX± 0.08 | XXX [±] |

TITLE: 2.54mm WTB Wafer 180° DIP Type

PART NO. TS242WV-XXXXB

CUSTOMER DRAWING

APPROVED: Paul CHECKED: Paul DRAWN: sunny

SCALE: 1:1 SHEET: 1/1

DATE: 20120418

鉅創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.