

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER




SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: Nylon 6T,UL94V-0
Color: Natural(Black)


Ordering Code:

TS248WR-S - X X X X


- ① Series No.
- ② No. of Circuits
- ③ Plating option:
G = Gold flash
- ④ Type: T = SMT Type

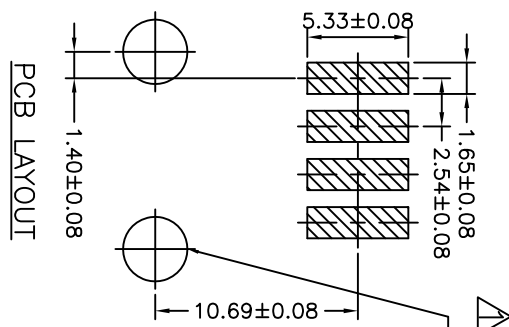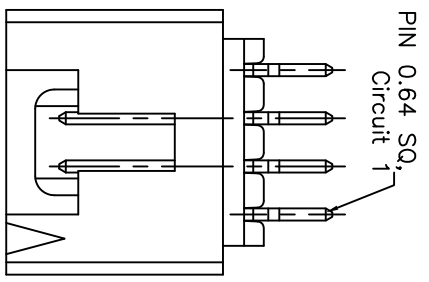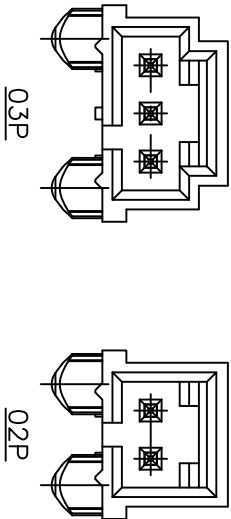

⚠️ ⌀3.40±0.05 DIA.THRU HOLE-2 PLCS.
(1.34±.002) FOR PCB RETENTION
⌀3.63±0.05 DIA.THRU HOLE-2 PLCS.
(1.43±.002) FOR LOCATION ONLY

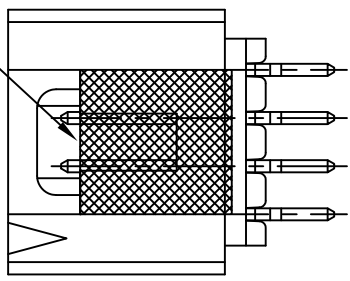

Circuits	Dimensions	
	A	B
2P	2.54	8.89
3P	5.08	11.43
4P	7.62	13.97
5P	10.16	16.51
6P	12.70	19.05
7P	15.24	21.59
8P	17.78	24.13
9P	20.32	26.67
10P	22.86	29.21
11P	25.40	31.75
12P	27.94	34.29

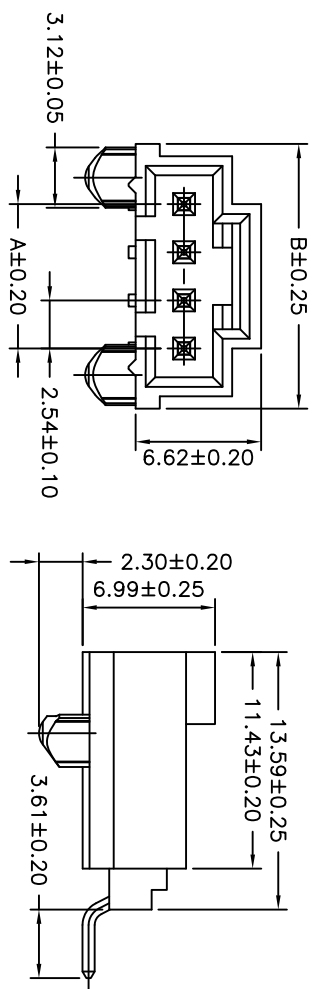

GENERAL TOLERANCE	
X± 0.40	X°± 1°
.X± 0.30	.X°±
.XX± 0.20	.XX°±
.XXX± 0.10	.XXX°±

TITLE: 2.54mm Wider RA SMT Type

CUSTOMER DRAWING			
APPROVED	CHECKED:	DRAWN:	DATE:
Paul	Paul	sunny	III
SCALE: 1:1		SHEET: 1 / 1	
20120418		B	

銳創科技有限公司
TRONTEK TECHNOLOGY CO.,LTD.