



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER







Type: O



Type: P

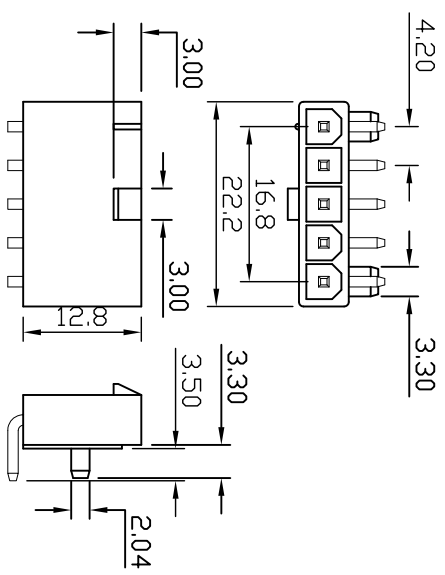

Type: E

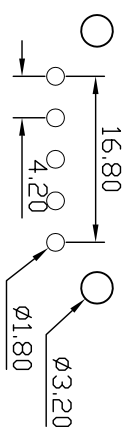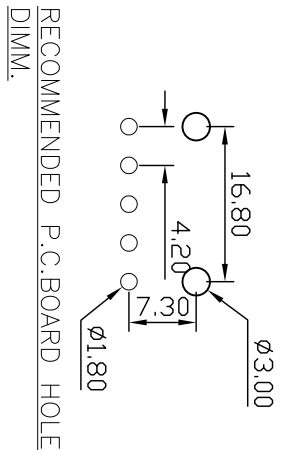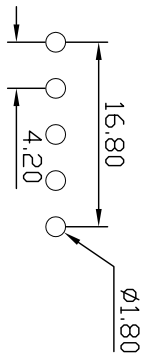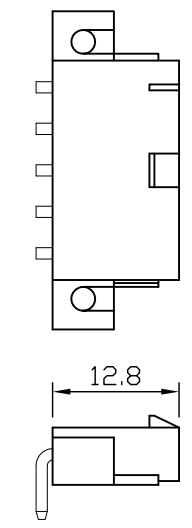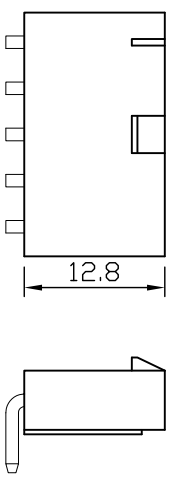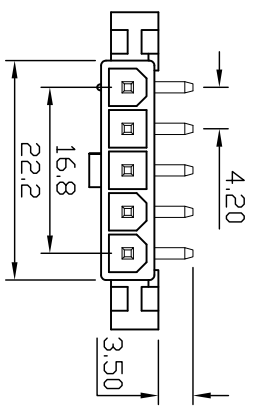

RECOMMENDED P.C. BOARD HOLE DIMM.

Ordering Code:

TP425WR - F - X X X X
 ① Series No. ② X ③ X ④ X
 ① No. of Circuits

- ③ Plating Code:
- T = Tin over Nickel
- ④ Variation: 0 = Without Nickel
- P = With Peg
- E = With mounting ears

Material: Nylon 6/6, UL 94V-2, Natural
 Conductor: Brass, Tin-Plated
 Plating: Sn 100U”
 Available: 2~6P

Circuits	Dim. A	Dim. B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

鉅創科技有限公司
 TRONTEK TECHNOLOGY CO., LTD.

TITLE: 4.2mm Power Connector RA Single Row

PART NO. TP425WR-F-XXXX

DWG NO. 20120812

GENERAL TOLERANCE		TITLE:	
X±	X± 1°	鉅創科技有限公司	
X± 0.30	X±	TRONTEK TECHNOLOGY CO., LTD.	
XX± 0.20	XX±	4.2mm Power Connector RA Single Row	
XXX± 0.10	XXX±	PART NO. TP425WR-F-XXXX	
CUSTOMER DRAWING		DRAWN BY: frank	
APPROVED	CHECKED:	SCALE: 1:1	SHEET: 1 / 1
Kevin	Paul	PROJ:	REV: A