



REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER

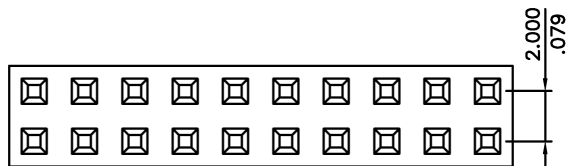

Material:

- * Insulation: Glass filled polyester UL 94V-0, Nylon 6T
- * Contact: Phosphor Bronze


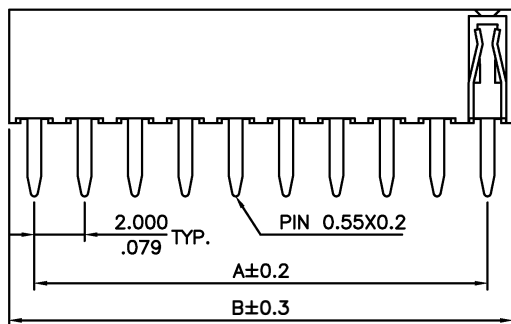


Ordering Code:

W62F8X0D - X X X 0

① ② ③ ④ ⑤

- ① Series No.
- ② Plating code:
G=Gold Flash plated over
1.27 μm (50 μ") Nickel
- ③ No. of Contact: 04 to 80
- ④ OTHER OPTIONS:
0=STANDART
- ⑤ PACKING



Recommended P.C. Board Layout

A = 2.00 * No. of Spaces
 B = A + 2.50
 * Available in 4 through 80 circuits

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.	
X ±	X* ± .1*	TITLE: FEMALE HEADER 2.0mm(.079") DUAL ROW H4.3mm DIP	
.X ±	.X* ±		
.XX ±	.XX* ±		
.XXX ±	.XXX* ±		
CUSTOMER DRAWING		PART NO. W62F8X0D-XXXC	DWG NO. 20120326
APPROVED Paul	CHECKED: Paul	DRAWN: sunny	UNIT mm
SCALE: 4:1		SHEET: 1 / 1	
PROJ.		REV. A	