

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGERR

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-flash
 Solder Tabs: Brass/Gold-flash
 Cdp: LCP,UL94V-0,Natural
 Wafer: LCP,UL94V-0
 Color: Natural


Ordering Code:

TS122WV-SF - X X X X X X-00
 ① ② ③ ④ ⑤

- ① Series No.
- ② Contacts: 10 to 40
- ③ Plating:
G= Gold Flash Plated
- ④ A= Reel packing
- ⑤ REMARKS
HF=Halogen-Free

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
TS122WV-SF-10GA	5.00	12.50
TS122WV-SF-14GA	7.50	15.00
TS122WV-SF-20GA	11.25	18.75
TS122WV-SF-30GA	17.50	25.00
TS122WV-SF-36GA	21.25	28.75
TS122WV-SF-40GA	23.75	31.25
TS122WV-SF-42GA	25.00	32.50

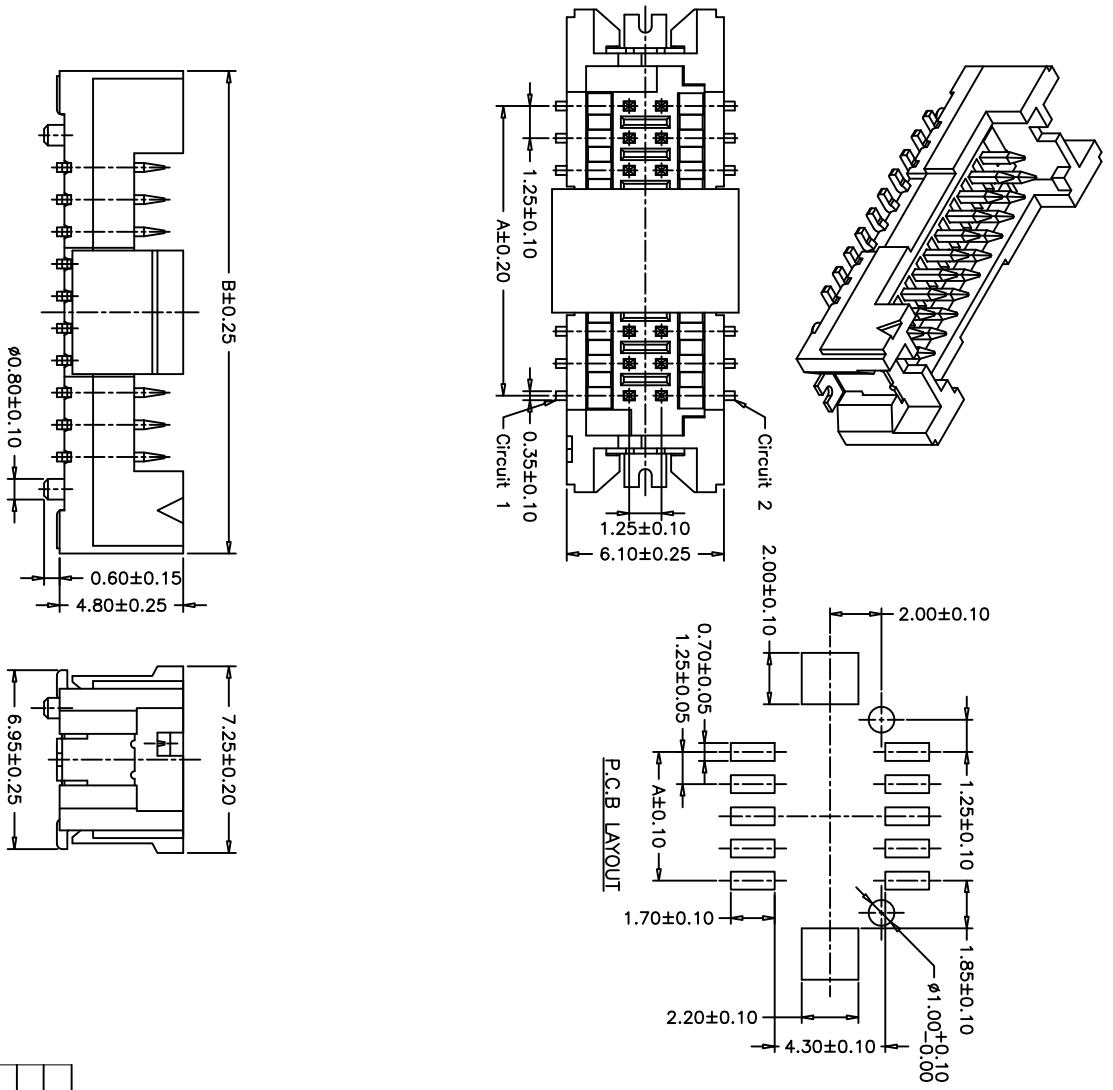

GENERAL TOLERANCE	
X±	X*± 1°
X± 0.25	X*±
.XX± 0.15	.XX*±
.XXX± 0.05	.XXX*±

TITLE: 1.25mm PITCH 180°DUAL ROW WAFER - SMT TYPE

CUSTOMER DRAWING		PART NO. TS122WV-SF-XXXX		DWG NO. 20121103	
APPROVED	CHECKED:	DRAWN:	UNIT:	SCALE:	SHEET: 1 / 2
allen	allen	sunny	mm	1:1	B

鉅創科技有限公司
 TRONTEK TECHNOLOGY CO., LTD.