





REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Gold-plated  
 Solder Tabs: Brass/Gold-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Belge)




Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
TS124WR-S-02XX	1.25	7.65	8.07
TS124WR-S-03XX	2.50	8.90	9.32
TS124WR-S-04XX	3.75	10.15	10.57
TS124WR-S-05XX	5.00	11.40	11.82
TS124WR-S-06XX	6.25	12.65	13.07
TS124WR-S-07XX	7.50	13.90	14.32
TS124WR-S-08XX	8.75	15.15	15.57
TS124WR-S-09XX	10.00	16.40	16.82
TS124WR-S-10XX	11.25	17.65	18.07
TS124WR-S-11XX	12.50	18.90	19.32
TS124WR-S-12XX	13.75	20.15	20.57
TS124WR-S-14XX	16.25	22.65	23.07
TS124WR-S-15XX	17.50	23.90	24.32
TS124WR-S-16XX	18.75	25.15	25.57
TS124WR-S-20XX	23.75	30.15	30.57
TS124WR-S-30XX	36.25	42.65	43.07

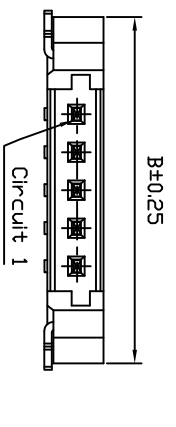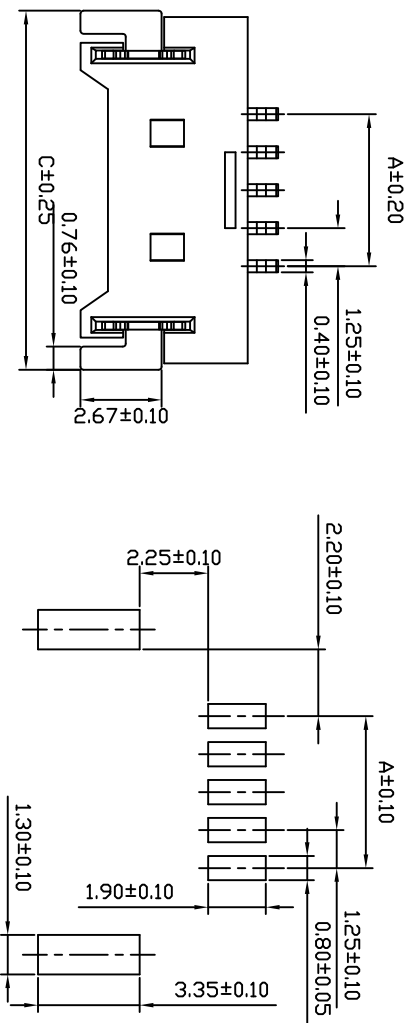

P.C.B. LAYOUT

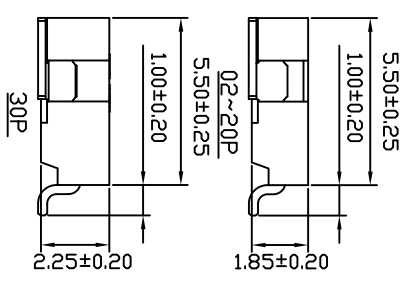

**Ordering Code:**  
 TS124WR-S - X X X X X  
 ① Series No.  
 ② NO. OF CIRCUITS:  
 ③ PLATING OPTION: G= Gold Flush plated  
 ④ OPTION: C= STANDARD(TUBE PACKING)  
 A= TAPE & REEL PACKING

GENERAL TOLERANCE		X±1°	
X±	X± 0.25	X±	X±
.XX±	.015	.XX±	.XX±
.XXX±	.008	.XXX±	.XX±

**CUSTOMER DRAWING**

PART NO.: TS124WR-S-XXXXX

TITLE: 1.25mm RIGHT ANGLE SMT TYPE WAFER

鉅創科技有限公司  
 TRONTEK TECHNOLOGY CO.,LTD.

APPROVED	CHECKED:	DRAWN:	SCALE:	SHEET:
Pauli	Pauli	ANDY	1:1	1 / 2
			mm	B