

REV.	ECH. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin-plated
Solder Tabs: Phosphor Bronze/Tin-plated
Material: PA,9T,UL94V-0
Color: Natural(Belge)

Ordering Information & Dimensions




Ordering Information & Dimensions

Pin	A	B
2	1.25	5.75
3	2.50	7.00
4	3.75	8.25
5	5.00	9.50
6	6.25	10.75
7	7.50	12.00
8	8.75	13.25
9	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50
14	16.25	20.75
15	17.50	22.00

Ordering Code:

TSI28WV-S-**X**X X X X X-**00**
①

- ① Series No.
- ② No. of Circuits
- ③ Plating option:
T= 3.05µm (120µ") Matte Tin
over 0.76µm(30µ") Nickel
G= Gold Flash plated over
1.27µm(50µ") Nickel
- ④ OPTION: C= Tube Packing
A= Tape & Reel Packing
- ⑤ -HF=For Lead Free Wave flow Process
and Halogen-Free

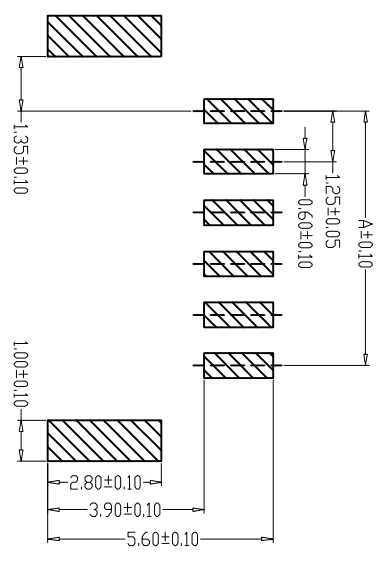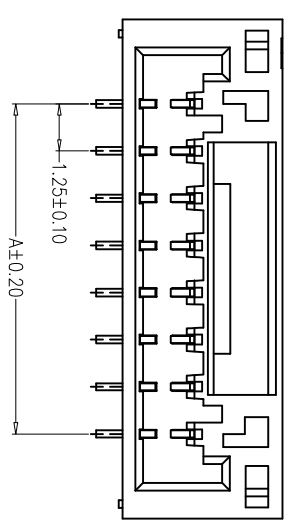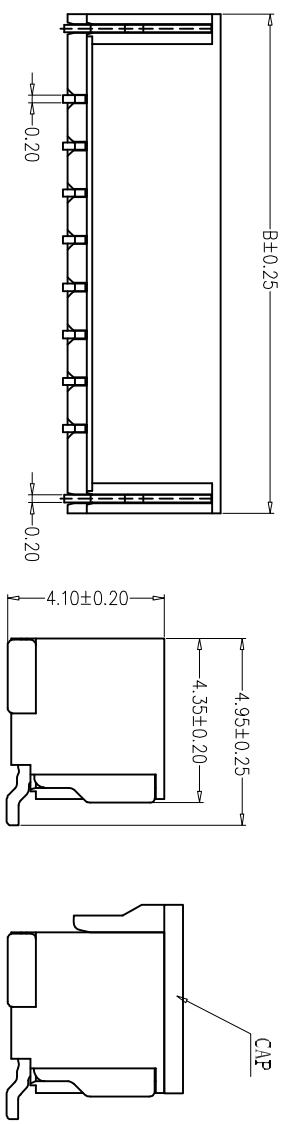

PCB LAYOUT

GENERAL TOLERANCE	X±	1°
X±	X±	1°
X± 0.30	X±	
.XX± 0.20	XX±	
.XXX± 0.10	XXX±	

鉅創科技有限公司
TRONTEK TECHNOLOGY CO., LTD.
TITLE:
1.25mm PITCH
180° WAFER-SMT TYPE

CUSTOMER DRAWING
PART NO. TS126WV-S-XXXX-XX
DWG. NO. 20180427

APPROVED Kevin
CHECKED: Paul
DRAWN: Frank
SCALE: 1:1
SHEET: 1 / 1
FIG.: A