


REV.	ECON NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER

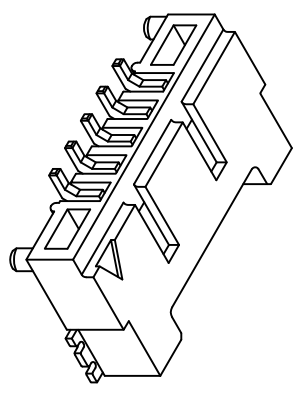

Ordering Code:


TS129WR-S - X X X X

- ① Series No.
- ② NO. OF CIRCUITS:
- ③ PLATING OPTION: T= Tin Over Nickel
- ④ OPTION: C= Tube Packing


A= Tape & Reel Packing
 A= Tube & Reel Packing

SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

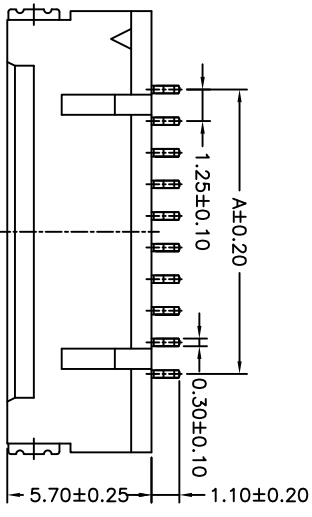



04P~30P

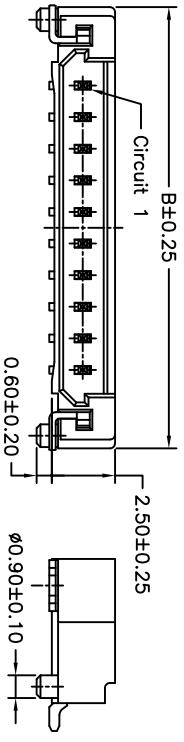

P.C.B. LAYOUT

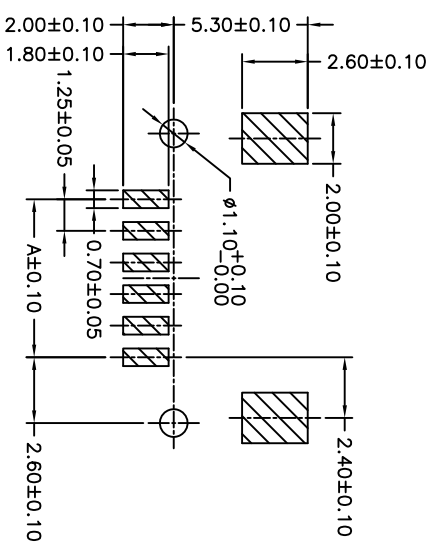

Circuits	Dimension	
	A	B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45



02P

03P

鉅創科技有限公司
 TRONTEK TECHNOLOGY CO., LTD.

TITLE: 1.25mm W to B CONN RA With Polarizing Peg SMT

CUSTOMER DRAWING

GENERAL TOLERANCE	
X±	X*± 1°
.X± 0.25	.X*±
.XX± 0.15	.XX*±
.XXX± 0.08	.XXX*±

APPROVED	CHECKED:	DRAWN:	SCALE:	SHEET:
Kevin	Paul	Frank	1:1	1 / 1
			PROJ:	REV:
				A

20121121